


TICKET VALIDATOR

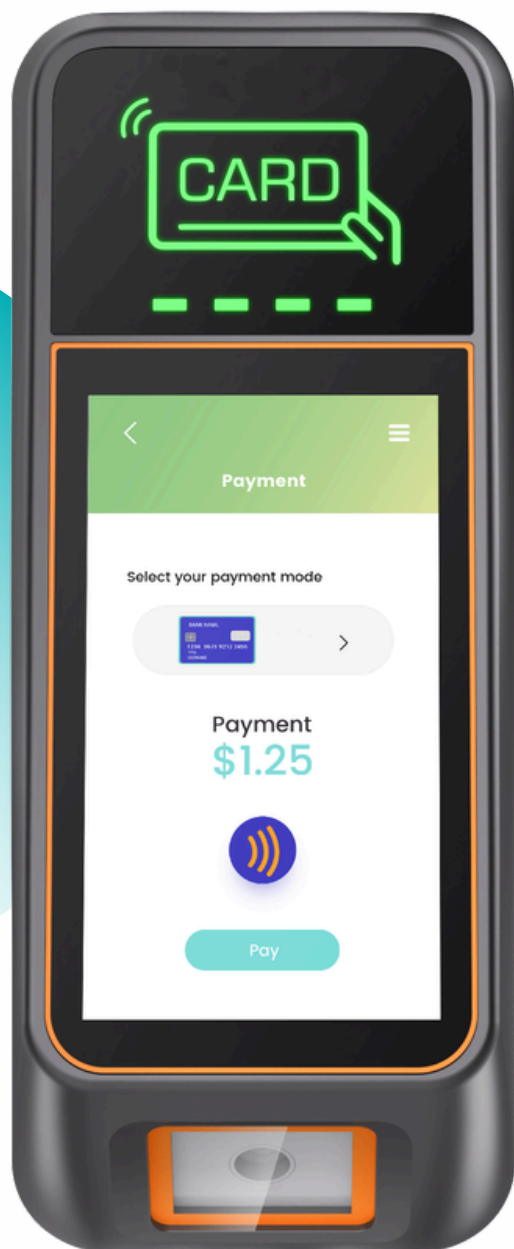

QR Reader

cEMV

Flexible Installation



TICKET VALIDATOR TV 01

Specifications

APPLICATION

- Public Bus
- Railway Station
- Subway - Metro

OS	Android 12
Processor	Quad- Core 2.0 GHz
Memory	2 GB RAM 16GB ROM, Ext. TF card slot 4GB RAM , 64GB ROM
Display	5.5inch, 720*1280
Keys	Key Lock
Contactless Card Reader	ISO 14443 Type A/B, MIFARE® Family EMV Contractless LI, Payware, Paypass
SIM Slots	2 SIMs - eSIM
SAM Slots	6 SAMs
Communications	LTE/WCDMA/GPRS/WIFI/Bluetooth
GPS	Built- in
External Antenna	Support GNSS/LTE/WCDMA/GPRS
LED Status Indicators	Indicator lights, 4 light optional
Peripheral Ports	1x RS232, 1x RS485, 1x USB-A, 1x TYPEC, 1x DC 1x LAN : Passive, POE : 12V / 24V, 1x Relay 4x GPIO (2x In, 2x Out)
Built-in 1 D/2D Barcode Reader	Hard Decoding
Switch	Key switch
Audio	Audio Speaker
Power Supply	DC 9-40V
Dimensions (mm)	With holder : 253 (L)*104(W)*138(H) Without holder: 253 (L)*104(W)*72(H)
Environmental	Operating temperature : -20°C ..+60°C Storage temperature: -40°C ..+80°C
Bracket	Support
Certification	CE, ROHS, IP54, IK07

<https://movinton.com>

info@robopine.com